



Rush Truck Center, Valdosta GA
3640 Whitewater Rd.
Valdosta, Georgia 31601

Customer Proposal Letter

Cook County Board of Commissioners
1200 Hutchinson Avenue
Adel, GA 31620
(229) 896-2266

Jeff Lane, thank you for the opportunity to earn your business. We look forward to working with you on your business needs. Please accept the following proposal.

VEHICLE

Make International Model HX615 Year 2018 Stock Number 915025
Additional Vehicle and Accessories Description _____ To be delivered on or about _____

Quantity	1	Total
Truck Price per Unit	<u>\$131,086.00</u>	<u>\$131,086.00</u>
F.E.T. (Factory & Dealer Paid)	<u>\$0.00</u>	<u>\$0.00</u>
Net Sales Price	<u>\$131,086.00</u>	<u>\$131,086.00</u>
Optional Extended Warranty(ies)	_____	_____
State Sales Tax	_____	_____
Documentary Fee	<u>\$125.00</u>	<u>\$125.00</u>
Administration Fee	<u>\$39.00</u>	<u>\$39.00</u>
Vehicle Inventory Tax	_____	_____
Additional Taxes	_____	_____
Tire Recycling Program	_____	_____
Battery Disposal Fee	_____	_____
Out of State Vehicle Fee	_____	_____
Rebate(s)	_____	_____
Total Sales Price (Including Rebate(s))	<u>\$131,250.00</u>	<u>\$131,250.00</u>
Trade Allowance (see DISCLAIMER Below)	_____	<u>\$0.00</u>

Sales Representative

Brett Meeks

Purchaser

signature

printed name

signature

printed name

Accepted by Sales Manager or
General Manager

title

date

signature

printed name

Quote good until 7/25/2018

Note: The above Customer Proposal is a quotation only. Sale terms subject to approval of Sales Manager of Dealer.

DISCLAIMER: Any order based on this Proposal subject to Customer executing Dealer's standard form Retail Purchase Order incorporating above terms. Any documentary fees, state tax, title, registration and license fees subject to adjustment and change. Actual F.E.T. to be paid by Dealer, subject to adjustment. Any F.E.T. variance will be responsibility of Dealer. Manufacturer has reserved the right to change the price to Dealer of any vehicle not currently in Dealer's stock, without notice to Dealer. If Quoted Vehicle(s) not currently in Dealer's stock, Dealer reserves right to change Quotation Total to reflect any price increases from Manufacturer. This Proposal is based upon Dealer's current and expected inventory, which is subject to change. Dealer not obligated to retain any specific vehicles in stock, nor maintain any specific inventory level. Dealer shall not be obligated to fulfill Proposal in event quoted vehicle(s) not in stock or available within requested delivery schedule at time Proposal accepted. Dealer shall not be liable for any delay in providing or inability to provide Quoted Vehicle(s), where such inability or delay is due, in whole or in part, to any cause beyond the reasonable control of Dealer or is without the gross negligence or intended misconduct of Dealer. Above listed Trade Value based upon current appraisal of Trade Vehicle(s). Dealer may adjust Trade Value of Trade Vehicle(s) to reflect changes in condition and/or mileage of Trade Vehicle(s) between date of current appraisal and acceptance of this Proposal by Customer.



Hx615 SBA 6x4

Sales Proposal For:
Rush Truck Centers, Tifton

Presented By:
RUSH TRK CTR OF GA

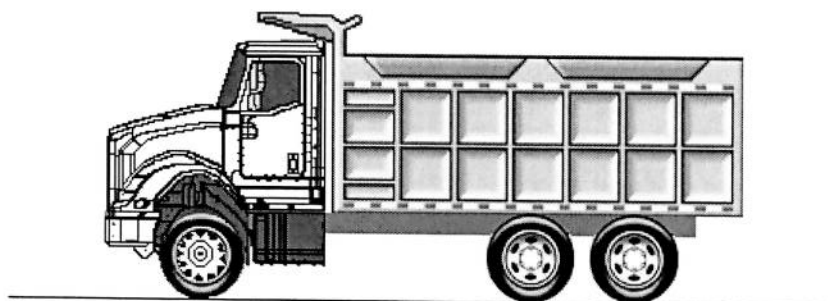
Prepared For:

Rush Truck Centers, Tifton
 Michael John Lovell
 16 Union Industrial Way
 Tifton, GA 31793-8329
 (229)472 - 5000
 Reference ID: N/A

Presented By:

RUSH TRK CTR OF GA
 Michael J Lovell
 16 UNION INDUSTRIAL WAY
 TIFTON GA 31793 - 8329
 (229)472-5200

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.


Model Profile
2019 HX615 SBA 6x4 (HX61F)

APPLICATION:	Construction Dump
MISSION:	Requested GVWR: 66000. Calc. GVWR: 59840 Calc. Start / Grade Ability: 42.42% / 1.98% @ 55 MPH Calc. Geared Speed: 89.8 MPH
DIMENSION:	Wheelbase: 199.00, CA: 133.90, Axle to Frame: 59.00
ENGINE, DIESEL:	{International A26} EPA 2017, 390HP @ 1700 RPM, 1450 lb-ft Torque @ 1000 RPM, 2100 RPM Governed Speed, 390 Peak HP (Max)
TRANSMISSION, MANUAL:	{Eaton Fuller UltraShift+ FO-16E309ALL-VMS} 11-Speed Fully Automated Manual; with Aluminum Clutch Housing, Overdrive, Electronic Shift Controls, Electric Clutch Actuation, Air Range Shift, Internal Lube Oil Pump, Hill Start Aid
CLUTCH:	{Eaton Fuller ECA-1850} Two-Plate, Ceramic, 7-Spring with Pre-Damper, 15.5" Diameter, with Adjustment-Free Feature, 1850 lb-ft Torque Capacity
AXLE, FRONT NON-DRIVING:	{Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity
AXLE, REAR, TANDEM:	{Meritor MT-40-14X-5DCR-P} Single Reduction, 40,000-lb Capacity, with Lube Oil Pump, w/ 5"(12.7mm) Wall Housing Thickness, Driver Controlled Locking Differential in Forward-Rear and Rear-Rear Axle, R Wheel Ends Gear Ratio: 3.90
CAB:	Conventional
TIRE, FRONT:	(2) 385/65R22.5 Load Range L HTC1 (CONTINENTAL), 495 rev/mile, 68 MPH, All-Position
TIRE, REAR:	(8) 11R22.5 Load Range H HDL2 (CONTINENTAL), 493 rev/mile, 75 MPH, Drive
SUSPENSION, REAR, TANDEM:	{Hendrickson HMX-460-54} Walking Beam Type, 54" Axle Spacing; 46,000-lb Capacity, with Rubber End Bushings, Transverse Torque Rods, Less Shock Absorbers
FRAME REINFORCEMENT:	Outer "C" Channel, Heat Treated Alloy Steel (120,000 PSI Yield); 10.813" x 3.892" x 0.312"; (274.6mm x 98.9mm x 8.0mm); 480.0" (12192mm) Maximum OAL
PAINT:	Cab schematic 100LW Location 1: 9219, Winter White (Std) Chassis schematic N/A

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
HX61F00	Base Chassis, Model HX615 SBA 6x4 with 199.00 Wheelbase, 133.90 CA, and 59.00 Axle to Frame.	9761/6787	16548
1652	CROSSMEMBER, REAR Relocated to End of Frame	-19/84	65
1AMR	CROSSMEMBER, FRAME TIE for Standard Duty	38/3	41
1CBU	FRAME RAILS Heat Treated Alloy Steel (120,000 PSI Yield); 10.125" x 3.580" x 0.312" (257.2mm x 90.9mm x 8.0mm); 480.0" (12192) Maximum OAL	-41/-37	-78
1GBP	FRAME REINFORCEMENT Outer "C" Channel, Heat Treated Alloy Steel (120,000 PSI Yield); 10.813" x 3.892" x 0.312"; (274.6mm x 98.9mm x 8.0mm); 480.0" (12192mm) Maximum OAL	298/531	829
1LEH	LICENSE PLATE HOLDER Single Plate, Swing Type, Mounted Below Front Bumper	1/0	1
1LTE	BUMPER, FRONT Full Width, Formed Stainless Clad Aluminum, Bright Finish	-62/11	-51
1VBC	TOW PIN, FRONT Heavy Duty; 150,000-lb. Total Capacity	91/-18	73
1WRZ	TOW HOOK, REAR (2) Frame Mounted; 80,000-lb. Total Capacity	-9/42	33
1WXH	WHEELBASE RANGE 187" (475cm) Through and Including 232" (590cm)	0/0	0
2ARY	AXLE, FRONT NON-DRIVING {Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity	126/0	126
3AGA	SUSPENSION, FRONT, SPRING Parabolic, Taper Leaf, 20,000-lb Capacity; with Shock Absorbers	-26/0	-26
4091	BRAKE SYSTEM, AIR Dual System for Straight Truck Applications	0/0	0
	<u>Includes</u>		
	: BRAKE LINES Color and Size Coded Nylon		
	: DRAIN VALVE Twist-Type		
	: DUST SHIELDS, FRONT BRAKE		
	: DUST SHIELDS, REAR BRAKE		
	: GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster		
	: PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel		
	: PARKING BRAKE VALVE For Truck		
	: QUICK RELEASE VALVE On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4		
	: SLACK ADJUSTERS, FRONT Automatic (with Air Cam Brakes)		
	: SLACK ADJUSTERS, REAR Automatic (with Air Cam Brakes)		
	: SPRING BRAKE MODULATOR VALVE SR-7 with relay valve for 6x4/8x6		
	: SWITCH, AUXILIARY Interrupter for Cab Clearance/Marker Lights (Blinks Lights with Headlight Switch in "ON" Position); Instrument Panel Mounted		
4193	BRAKES, FRONT, AIR CAM 16.5" x 6", Includes 24 SqIn Long Stroke Brake Chambers	0/0	0
4619	TRAILER CONNECTIONS Four-Wheel, with Hand Control Valve and Tractor Protection Valve, for Straight Truck	2/0	2
4AZJ	AIR BRAKE ABS {Bendix AntiLock Brake System} Full Vehicle Wheel Control System (4-Channel) with Automatic Traction Control	0/0	0
4EBS	AIR DRYER {Bendix AD-9} with Heater	0/0	0
4EXU	BRAKE CHAMBERS, REAR AXLE {Bendix EverSure} 30/30 Spring Brake	0/0	0
4EXV	BRAKE CHAMBERS, FRONT AXLE {Bendix} 24 SqIn	0/0	0

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
4LAA	SLACK ADJUSTERS, FRONT {Haldex} Automatic	0/0	0
4LGA	SLACK ADJUSTERS, REAR {Haldex} Automatic	0/0	0
4NDB	BRAKES, REAR, AIR CAM S-Cam; 16.5" x 7.0"; Includes 30/30 Sq. In. Long Stroke Brake Chamber and Spring Actuated Parking Brake	0/0	0
4SPM	AIR COMPRESSOR {Bendix BA-921 Head Unload} 15.9 CFM Capacity, Single Cylinder	0/0	0
4VGM	AIR TANK Polished Aluminum, with Straight Thread O-Ring Ports	-20/-8	-28
4WDW	BRAKE CHAMBERS, SPRING on Rear/Rear Axle Located Inside Rear Tire Envelope (Meets Asphalt Spreader/Paver Clearance Requirements)	0/0	0
4WRJ	AIR COMPRESSOR DISCHARGE LINE 1/2" ID to 5/8" ID Teflon Hose, with Stainless Steel Braid; to Air Dryer	0/0	0
4WWZ	DRAIN VALVE (3) with Pull Chains for Air Tanks	0/0	0
5710	STEERING COLUMN Tilting and Telescoping	0/0	0
5CBE	STEERING WHEEL 4-Spoke; 18" Dia., Black Leather Wrapped	0/0	0
5PTB	STEERING GEAR (2) {Sheppard M100/M80} Dual Power	109/-12	97
7BES	AFTERTREATMENT COVER Polished Aluminum	0/0	0
7BLJ	EXHAUST SYSTEM Single Horizontal Aftertreatment Device, Frame Mounted Right Side Under Cab; for Single Vertical Tail Pipe, Right Side Cab Mounted	-77/-22	-99
7SDK	ENGINE COMPRESSION BRAKE by Jacobs; for N13/A26 Engines, with Selector Switch and On/Off Switch	46/3	49
7WBA	TAIL PIPE (1) Turnback Type, Bright, for Single Exhaust	0/0	0
7WBS	MUFFLER/TAIL PIPE GUARD (1) Bright Stainless Steel	0/0	0
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment	0/0	0
	<u>Includes</u>		
	: HAZARD SWITCH Integral with Turn Signal Switch		
	: HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever		
	: PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light		
	: STARTER SWITCH Electric, Key Operated		
	: STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector		
	: TURN SIGNAL SWITCH Manual Cancelling with Lane Change Feature		
	: TURN SIGNALS, FRONT Includes Integral Reflectors and Side Marker Lights; Fender Mounted		
	: WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature, Steering Column Mounted		
	: WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted		
	: WIRING, CHASSIS Color Coded and Continuously Numbered		
8541	HORN, ELECTRIC (2) Disc Style	1/0	1
8554	TRAILER CONNECTION SOCKET 7-Way; Mounted at Rear of Frame	-1/5	4
8718	POWER SOURCE Cigar Type Receptacle without Plug and Cord	0/0	0
8GGN	ALTERNATOR {Bosch LH160} Brush Type, 12 Volt 160 Amp. Capacity, Pad Mount	0/0	0
8HAE	BODY BUILDER WIRING Rear of Frame; Includes Sealed Connectors for Tail/ Amber Turn/Marker/ Backup/Accessory Power/Ground and Sealed Connector for Stop/Turn	0/3	3

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
8MKL	BATTERY SYSTEM {International} Maintenance-Free, (3) 12-Volt 1950CCA Total	0/0	0
8RMB	RADIO AM/FM/CD/WB/Clock/Bluetooth/USB Input/3MM Auxiliary Input, MP3, Apple Device Play & Control, Bluetooth for Phone & Music, with Multiple Speakers	2/0	2
8RMG	ANTENNA BASE (2) Single Function, (1) for CB and (1) for Entertainment Radio, without Splitter, Separate Lead-Ins, with CB Antenna Mounted on Left Mirror and AM/FM Antenna Mounted on Right Mirror	0/0	0
8TKB	STOP, TURN, TAIL & B/U LIGHTS {Truck Lite} Super 44, with LED Lights for Stop, Turn & Tail Lights and Truck Lite Super 40 for Backup Lights, with Power Module, "International" Termination and Less Junction Box	-2/10	8
8VUH	BATTERY BOX COVER Polished Aluminum	2/0	2
8VUK	BATTERY BOX Aluminum with Plastic Cover, 18" Wide, 2, 3, or 4 Battery Capacity, Mounted Right Side Back of Cab	0/0	0
8WBW	JUMP START STUD Remote Mounted	2/0	2
8WCK	POWER SOURCE, TERMINAL TYPE 2-Post	0/0	0
8WEZ	TURN SIGNAL SWITCH Self-Canceling	0/0	0
8WHJ	HORN, AIR (2) {Grover} Rectangular Bell; Chrome	4/0	4
8WNH	RUNNING LIGHT (2) Daytime	0/0	0
8WRB	HEADLIGHTS ON W/WIPERS Headlights Will Automatically Turn on if Windshield Wipers are turned on	0/0	0
8WXG	STARTING MOTOR {Mitsubishi Electric Automotive America 105P} 12-Volt, with Soft-Start	0/0	0
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses	0/0	0
8XCC	TOGGLE SWITCH, AUXILIARY (2) with Two 20-Amp Fuses/Circuit Breakers	1/0	1
8XHT	HEADLIGHTS Halogen, Composite Combination	0/0	0
9585	FENDER EXTENSIONS Rubber	0/0	0
9AAB	LOGOS EXTERIOR Badges	0/0	0
9AAE	LOGOS EXTERIOR, ENGINE Badges	0/0	0
9ASE	FRONT END Tilting Composite	0/0	0
9HCN	GRILLE , Chrome Vertical Accent Bars with Black Mesh	0/0	0
9WAC	BUG SCREEN Mounted Behind Grille	5/0	5
9WBD	BUG DEFLECTOR Stainless Steel, Mounted on Hood	5/0	5
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100	0/0	0
	<u>Includes</u> : PAINT SCHEMATIC ID LETTERS "LW"		
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone	0/0	0
10UAD	VEHICLE REGISTRATION IDENTITY ID for 49 States, Excluding California	0/0	0
10WCY	SAFETY TRIANGLES	5/1	6

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
11MGP	CLUTCH {Eaton Fuller ECA-1850} Two-Plate, Ceramic, 7-Spring with Pre-Damper, 15.5" Diameter, with Adjustment-Free Feature, 1850 lb-ft Torque Capacity	0/0	0
12703	ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection	0/0	0
12864	BLOCK HEATER, ENGINE {Phillips} 120V/1500W	2/0	2
12BDZ	ENGINE, DIESEL {International A26} EPA 2017, 390HP @ 1700 RPM, 1450 lb-ft Torque @ 1000 RPM, 2100 RPM Governed Speed, 390 Peak HP (Max)	0/0	0
12THT	FAN DRIVE {Horton Drivemaster} Direct Drive Type, Two Speed with Residual Torque Device for Disengaged Fan Speed	0/0	0
12VBB	AIR CLEANER Dual Element	1/0	1
12VGK	FEDERAL EMISSIONS {International A26} EPA, OBD and GHG Certified for Calendar Year 2018	0/0	0
12WBR	FAN OVERRIDE Manual; with Electric Switch on Instrument Panel, (Fan On with Switch On)	0/0	0
12WEG	COLD STARTING EQUIPMENT Automatic; with Engine ECM Control	0/0	0
12WGA	HOSE CLAMPS, RADIATOR HOSES , Mechanical Type; with Constant-Tension Functionality	0/0	0
12WTA	FAN DRIVE SPECIAL EFFECTS Fan Cooling Ring with Fan Shroud Effects, Engine Mounted	0/0	0
12WYZ	RADIATOR DRAIN & FILL FITTING SPECIAL; To Vacuum Out or Fill the Cooling System from the Bottom of Radiator, for Use with Quick-Connect Radiator Drain Tool or Shop Coolant Evacuation-Fill System	0/0	0
12WZJ	EMISSION COMPLIANCE Low NOx Idle Engine, Complies with California Clean Air Regulations; Includes "Certified Clean Idle" Decal located on Driver Door	0/0	0
12XBC	RADIATOR Aluminum; Welded, Down Flow System, Front to Back, 1325 SqIn, 806 SqIn CAC	0/0	0
13GWW	TRANSMISSION, MANUAL {Eaton Fuller UltraShift+ FO-16E309ALL-VMS} 11-Speed Fully Automated Manual; with Aluminum Clutch Housing, Overdrive, Electronic Shift Controls, Electric Clutch Actuation, Air Range Shift, Internal Lube Oil Pump, Hill Start Aid	291/111	402
13WGJ	OIL COOLER MANUAL TRANSMISSION Water to Oil Type Included in Radiator End Tank (REQUIRES TRANSMISSION LUBE PUMP)	4/0	4
13WLX	TRANSMISSION OIL {EmGard 40W} Synthetic; 22 thru 33.99 Pints	0/0	0
13WVD	PTO CONTROL, DASH MOUNTED For Customer Provided PTO; Includes Control Valve, Piping and Wiring, Wired for PTO	0/0	0
14862	PDL WARNING BUZZER Power Divider Lock	0/0	0
14AJX	SHIELD, TEMPERATURE SENSOR Mounted to Rear Axle	0/2	2
14GVM	AXLE, REAR, TANDEM {Meritor MT-40-14X-5DCR-P} Single Reduction, 40,000-lb Capacity, with Lube Oil Pump, w/.5"(12.7mm) Wall Housing Thickness, Driver Controlled Locking Differential in Forward-Rear and Rear-Rear Axle, R Wheel Ends . Gear Ratio: 3.90	0/78	78

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
14ULY	SUSPENSION, REAR, TANDEM {Hendrickson HMX-460-54} Walking Beam Type, 54" Axle Spacing; 46,000-lb Capacity, with Rubber End Bushings, Transverse Torque Rods, Less Shock Absorbers	0/23	23
14WAL	SUSPENSION/REAR-AXLE IDENTITY for Meritor Tandem Rear Axles with Bar-Pin Beam Attachment Type Suspensions	0/0	0
14WBN	DIFF. SWITCH CONTROLS Two Independent Switches for Control Traction Differentials on Tandem Rear Axles, Mounted on Dash	1/0	1
14WMJ	AXLE, REAR, LUBE {EmGard FE-75W-90} Synthetic Oil; 50 thru 64.99 Pints	0/0	0
15BAA	DEF TANK COVER Stainless Steel	2/0	2
15DYP	DEF TANK 9.5 U.S. Gal. 35.9L Capacity, Frame Mounted Outside Left Rail, Under Cab	0/0	0
15LKX	FUEL/WATER SEPARATOR {Davco Fuel Pro 382} 12 VDC Electric Heater, Includes Pre-Heater, Includes Water-in-Fuel Sensor	3/0	3
15SSK	FUEL TANK Polished Aluminum, 24" Dia, 100 US Gal (379L), Mounted Left Side, Under Cab	46/34	80
16031	CAB Conventional	0/0	0
	<u>Includes</u>		
	: CLEARANCE/MARKER LIGHTS (5) LED Roof Mounted		
	: COAT HOOK, CAB Located on Rear Wall, Centered Above Rear Window		
	: CONSOLE, CENTER Includes Two Cup Holders with Ash Cup and One Additional Storage Area		
	: GLASS, ALL WINDOWS Tinted		
	: GRAB HANDLE, CAB INTERIOR (2) One Each Side		
	: GRAB HANDLE, EXTERIOR (2) Mounted Behind Driver and Passenger Doors		
	: SPEAKERS IN CAB (4) Two Located in B-Pillar, Two Located Overhead on Driver and Passenger Sides		
	: STEP (4) Two Steps Per Door		
16564	HEATER SHUT-OFF VALVES (1) Ball Valve Type, Supply Line	0/0	0
16HBA	GAUGE CLUSTER English with English Electronic Speedometer	0/0	0
16HGL	GAUGE, OIL TEMP, REAR AXLE	0/0	0
16HLC	GAUGE, AIR CLEANER RESTRICTION {Filter-Minder} Mounted in Instrument Panel	0/0	0
16HLD	INDICATOR TRANS GEAR POSITION Display Gear Transmission	0/0	0
16JPD	SEAT, DRIVER {National 2000 Model 195} Air Suspension, High Back, Vinyl Boxing with Cloth Facing, 2 Arm Rests, Isolator, Adjuster, 3 Chamber Lumbar, 6 Position Front Cushion Adjust, 3 Position Rear Cushion Adj, 2-15 Degree Back Angle Adjust, Vinyl Suspension Cover	4/0	4
16RAN	SEAT, PASSENGER {National 2000 Model 192} Non Suspension, High Back, Vinyl Boxing with Cloth Facing, 11 Degree Back Angle Adjust	25/8	33
16SNR	MIRRORS (2) Power Adjust, Thermostatically Controlled Heated Heads, LED Clearance Lights, Bright Finish Heads and Arms, Black Brackets, 7.55" x 14.1" Flat Glass, 7.48" x 6.77" Convex Glass Both Sides	5/0	5
16SNX	MIRROR, CONVEX, LOOK DOWN Right Side, Bright, 6" x 10 1/4"	2/0	2
16SNY	MIRROR, CONVEX, HOOD MOUNTED Right and Left Sides; 7.48" x 6.77" Convex Glass, Bright	11/-1	10

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
16UZJ	STORAGE, REAR WALL Storage Pocket, Located on Back Wall Between Driver and Passenger Seats	3/0	3
16VAW	STORAGE, CAB INTERIOR Molded Holder for Thermos, Maps, and CD's; Located at Base of Passenger Seat	4/0	4
16VKA	CAB INTERIOR TRIM Diamond, for HX Day Cab <u>Includes</u> : CONSOLE, OVERHEAD Molded Plastic with Three Storage Pockets; One with Velcro Strap for CB Radio Mounting; Two with Netting; Light Switches for Dome and Courtesy Lights : FLOOR COVERING Rubber, Black : SUN VISOR (2) Vinyl with Toll Ticket Strap	5/0	5
16VRT	HEATER, ENHANCED CIRCULATION {Bergstrom} Control, for Extreme Cold Weather Climates	0/0	0
16VZA	WINDOW, REAR 52.25" Wide	0/0	0
16WAK	WINDOW, POWER (2) in Left and Right Doors	0/0	0
16WHJ	HOSE CLAMPS, HEATER HOSE {Breeze} Belleville Washer Type	0/0	0
16WJG	CAB DOOR LOCKS Power	0/0	0
16WKB	AIR CONDITIONER {International Blend-Air} with Integral Heater & Defroster	0/0	0
16WKR	WINDSHIELD Single Piece	0/0	0
16WLD	CAB REAR SUSPENSION Dual Frame Mounted Cab Rear Air Suspension; Includes Special Crossmember Assembly	0/0	0
16XBK	MODESTY PANEL Polished Stainless Steel, with LED Lights, for Day Cab	0/0	0
16XWE	SUNSHADE, EXTERIOR Bright Finish; Includes Integral Clearance/Marker Lights	20/1	21
16ZHD	GRAB HANDLE Exterior; Towel Bar Type, with Anti-Slip Rubber Inserts, In Lieu of Standard Grab Handles, for Use with Cab Access, without Frame Access or Chassis Skirts, Conventional	0/0	0
27DHJ	WHEELS, FRONT DISC; 22.5x12.25 Rims, Polished Aluminum, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs	-6/0	-6
28DMC	WHEELS, REAR DUAL DISC; 22.5x8.25 Rims, Polished Aluminum, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs	0/-192	-192
29WLK	WHEEL BEARING, FRONT, LUBE {EmGard FE-75W-90} Synthetic Oil	0/0	0
7382135432	(8) TIRE, REAR 11R22.5 Load Range H HDL2 (CONTINENTAL), 493 rev/mile, 75 MPH, Drive	0/48	48
7792655412	(2) TIRE, FRONT 385/65R22.5 Load Range L HTC1 (CONTINENTAL), 495 rev/mile, 68 MPH, All-Position	86/0	86
Services Section:			
40124	WARRANTY Standard for HX Series, Effective with Vehicles Built December 7, 2015 or Later, CTS-2015A	0/0	0
Total Component Weight:		10751/7495	18246

The weight calculations included in this proposal are an estimate of future vehicle weight. The actual weight as manufactured may be different from the estimated weight. Navistar, Inc. shall not be liable for any consequences resulting from any differences between the estimated weight of a vehicle and the actual weight.



TRUCK BODIES & EQUIPMENT INTERNATIONAL, Inc.
Ox Bodies | Crystal | DuraClass | Rugby | J-Craft | Hardee

Quote Response Form

Page 1 of 3

02/22/2018 01:54 PM

Ox Bodies INC
719 Columbus Street East
PO Box 886
Fayette AL 35555
USA
800-844-2519

End User: UNKNOWN

Customer: 105376

MICHAEL JOHN LOVELL
RUSH TRUCK CENTER OF GEORGIA, INC.
2560 MORELAND AVE
ATLANTA GA 30315

Taken By:

Phone: 678-794-4394

Fax:

Estimate	Terms	Quote Date	Expiration Date	Salesperson	Customer Currency
FA01003921	Net 30 Days	2/22/2018	3/24/2018	MANN, CHARLES	USD
UM	Quantity Item	Description	Unit Price	Extended Price	
EA	1.00 2054711	MV85-1600-1518YD-63126-60/42/50-STD-T			

Yardage 15/16

Body Style: MAVERICK
Body ID: 85
Body Length: 16'
Hoist Model: 63126
Frame Style: TUBE w/X-MEM 12 C/L
Front Style: STRAIGHT
Rear Style: STRAIGHT
Front Exhaust Notch: NO
Front Height: 56
Side Height Front: 42
Side Height Rear: 42
Rear Height: 50
Side Material: SHEET-10GA-A36
Front Material: SHEET-10GA-A36
Tailgate Material: SHEET-1/4 AR450
Floor Material: SHEET-1/4 AR450
Skirt Material: NA
Cabshield Style: STANDARD
Cabshield Projection: 24
Cabshield Width: 85
Tarp Style: OX ELEC.
Tailgate Type: STANDARD
Coal Chutes: 0
Tailgate Bracing Style: 1 HORIZONTAL
Horizontal Side Brace: NO
Side Top Rail Style: 4x4x.120 (Standard)
Lineposts: YES
Dump Apron: HEAVY DUTY
Dump Apron Size: 10
Side Light Cutouts: LOWER FRONT
Metro Light Quantity: 1
Dirt Shedding Angle: NO
Board Holder Height: 8
Ladders / Steps: Ladder from Automation Model (STD Ladder)
Body Add-On: Paint
Paint: Stock Ox Color Black\

*** INSULATED SIDES&FRONT WITH ALUM***

Truck: Truck

Truck: Installed

Side Boards: BOARD KIT WOOD 8" - UP TO 17" - NOT SLOPED SIDES
Hydraulic Tank: HYD TANK PYRAMID FLAT BOTTOM STD PHINST
Rear Hinge: ASSEMBLY HINGE REAR REM LARGE(STD) PHINS
Hoist - STD FRAMES W/ TUBING RUNNERS: 1780208 - 63126 HYVA



TRUCK BODIES & EQUIPMENT INTERNATIONAL, Inc.
Ox Bodies | Crystal | DuraClass | Rugby | J-Craft | Hardoe

Quote Response Form

Page 2 of 3

02/22/2018 01:54 PM

Cab Controls: Auto Trans CTRL KIT ES PTO/CABLE TO PUMP PHINS 1250507
Pump - Auto Trans PUMP KIT CS/AUTO G102-D1-2.0(073)C/W ROT 1249981
PTO - Auto Transmission PTO KIT ELEC AT CS24-A1006-H3KX PHINST
Mud Flaps - Maverick / Chisholm: MUD FLAP KIT 30" W/GRVL GUARD MAV PHINST
Backup Alarm: STD BACK-UP ALARM KIT PHINST
Front Harness Options: LTS KIT-C/S-2 C/M-PHINST
Side Harness Options: LTS KIT-LWR FRT C/M-16 MAV-PHINST
Rear Harness Options: LTS KIT-1SET MET-PHINST
Truck Plug Options: VOLVO PIGTAIL
Air Tailgate Kit: TAILGATE KIT AIR PHINST
Insulation / Heating: Polished Aluminum Insulation on Front / Sides
Body Prop: BODY PROP PHINST KIT <=16FT
Chrome Turnout: Cabshield Installed - Chrome Turnout
Hi-Lift Tailgate Kit: Not Installed or N/A
Vibrator Kits: NONE
Cab Height: Other Cab Height (Specify on Order)

EA

1.00 1249376

TARP ELEC MT VIN W/FL AL 15-16 INS PKG